


ECOPIA™ EP422™

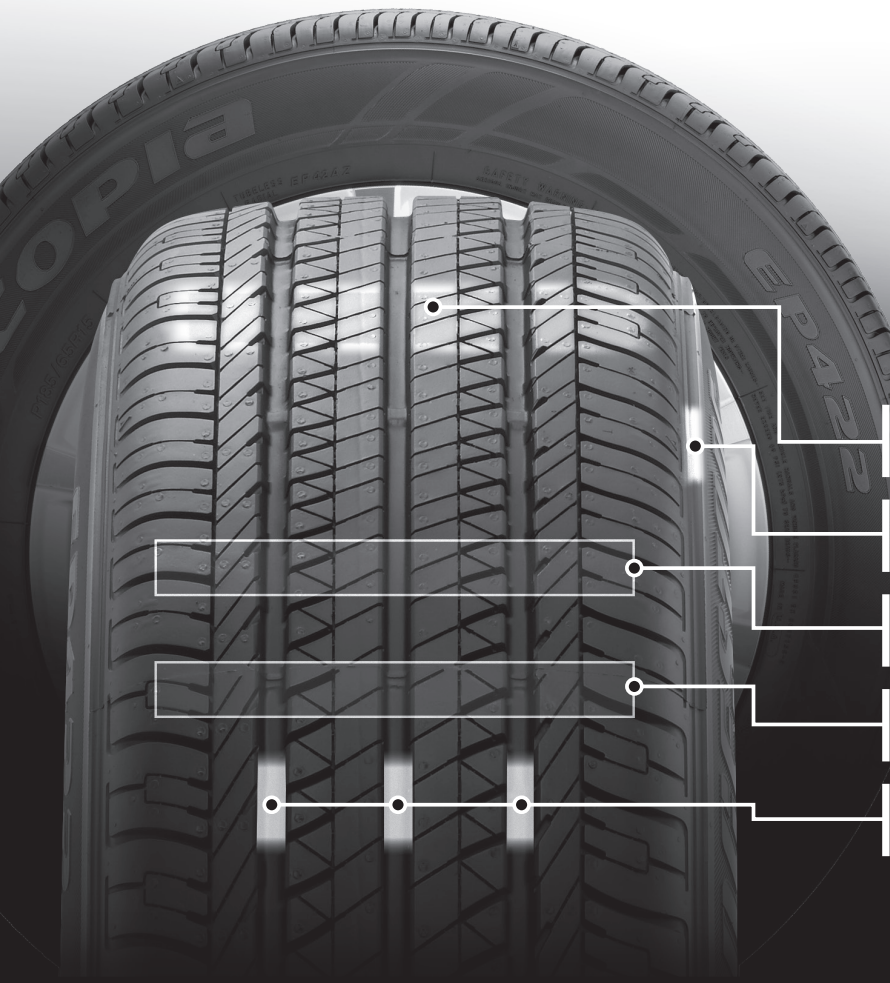

NanoPro-Tech

Improves rolling resistance and contributes to fuel-efficiency and CO2 reduction by controlling the interaction between polymer, filler materials and other rubber chemicals at the molecular level

Fuel Saver Sidewall Compound

Helps lower rolling resistance by both returning more energy back to the tire and reducing heat generation as compared to a traditional sidewall

Silica

Improves traction in wet conditions by increasing flexibility of tread compound

Recycled Ground Rubber

Made from ground-up post consumer tires, it contributes to 5% of the tread compound

Circumferential Grooves

Help channel water out of the footprint area to improve resistance to hydroplaning

ECO TOURING / PASSENGER

- 65,000 Mile/105,000 Kilometre Treadwear Limited Warranty*
- Platinum Pact 3-Year Limited Warranty*
- Buy & Try 30-Day Guarantee*

* Please refer to the appropriate Tire Limited Warranty booklet for complete limited warranty details. See each warranty at your authorized Bridgestone retailer for details and restrictions



THE LATEST IN OUR LINE OF ENVIRONMENT-CONSCIOUS TIRES, THE ECOPIA™ EP422™ IS an all-season tire that delivers a smooth, comfortable ride. It is designed to improve rolling resistance, which helps it achieve better gas mileage. With its innovative tread compound and advanced traction technology, the tire is a strong, reliable performer on wet and dry surfaces--all year long.

ECOPIA EP422 TIRE SPECIFICATIONS

Tire Size and Service Description	Load Range	Article Number	Sidewall Styling	Approved Rim Widths	Measuring Rim Width	Overall Tire Diameter	Overall Section Width	Tread Depth (32nd)	Revs Per Mile	UTQG	Wt.
15" Rim Diameter											
175/65R15 84H		144492	BW	5.0-6.0	5.0	24.0	7.0	10	868	480 A A	18
P185/65R15 86H		122732	BW	5.0-6.5	5.5	24.5	7.4	10	850	480 A A	18
P185/65R15* 86H		024957	BW	5.0-6.5	5.5	24.5	7.4	10	849	480 A A	17
195/65R15 91H		024498	BW	5.5-7.0	6.0	25.0	7.9	10	833	480 A A	19
P185/60R15* 84T		024583	BW	5.0-6.5	5.5	23.7	7.4	11	876	400 A A	16
P195/60R15 87H		144662	BW	5.5-7.0	6.0	24.2	7.9	10	861	480 A A	19
16" Rim Diameter											
205/65R16 95H		023257	BW	5.5-7.5	6.0	26.5	8.2	10	786	480 A A	21
215/65R16 98T		144611	BW	6.0-7.5	6.5	27.0	8.7	10	772	480 A A	24
235/65R16 103T		144849	BW	6.5-8.5	7.0	28.0	9.5	10	744	480 A A	28
P205/60R16 91H		144679	BW	5.5-7.5	6.0	25.7	8.2	10	811	480 A A	21
P215/60R16 94V		122783	BW	6.0-7.5	6.5	26.1	8.7	10	798	480 A A	23
P215/60R16 94H		129702	BW	6.0-7.5	6.5	26.1	8.7	10	798	480 A A	23
P225/60R16 97H		144645	BW	6.0-8.0	6.5	26.6	9.0	10	783	480 A A	24
195/55R16 87V		024515	BW	5.5-7.0	6.0	24.4	7.9	10	854	480 A A	18
P195/55R16* 86V		024974	BW	5.5-7.0	6.0	24.4	7.9	10	851	480 A A	19
205/55R16 91H		144543	BW	5.5-7.5	6.5	24.9	8.4	10	837	480 A A	19
P205/55R16* 89H		004285	BW	5.5-7.5	6.5	24.9	8.4	10	833	400 A A	18
P205/55R16* 89H		021625	BW	5.5-7.5	6.5	24.9	8.4	10	833	400 A A	23
215/55R16 93H		144832	BW	6.0-7.5	7.0	25.3	8.9	10	823	480 A A	21
205/50R16 87H		144815	BW	5.5-7.5	6.5	24.1	8.4	10	864	480 A A	19
17" Rim Diameter											
P215/65R17 98T		144628	BW	6.0-7.5	6.5	28.0	8.7	10	744	480 A A	25
P225/65R17 100T		144594	BW	6.0-8.0	6.5	28.5	9.0	10	731	480 A A	25
235/65R17 104H		144798	BW	6.5-8.5	7.0	29.1	9.5	10	716	480 A A	29
P215/60R17 95T		144560	BW	6.0-7.5	6.5	27.2	8.7	10	766	480 A A	23
P225/60R17 98H		144764	BW	6.0-8.0	6.5	27.6	9.0	10	755	480 A A	26
215/55R17* 94H		000214	BW	6.0-7.5	7.0	26.3	8.9	10	792	480 A A	22
P215/55R17 93V		144577	BW	6.0-7.5	7.0	26.3	8.9	10	792	480 A A	23
P225/55R17 95V		144866	BW	6.0-8.0	7.0	26.8	9.2	10	777	480 A A	25
205/50R17 93V	XL	144883	BW	5.5-7.5	6.5	25.1	8.4	10	830	480 A A	20
215/50R17 91V		144696	BW	6.0-7.5	7.0	25.5	8.9	10	817	480 A A	21
P225/50R17 93V		144730	BW	6.0-8.0	7.0	25.9	9.2	10	804	480 A A	25
P225/50R17 93T		144747	BW	6.0-8.0	7.0	25.9	9.2	10	804	480 A A	25
P215/45R17 87W		144526	BW	7.0-8.0	7.0	24.7	8.4	10	843	480 A A	24
18" Rim Diameter											
225/60R18 100H		002177	BW	6.0-8.0	6.5	28.6	9.0	10	728	480 A A	27
P215/55R18 94H		144713	BW	6.0-7.5	7.0	27.3	8.9	10	763	480 A A	24
P225/55R18 97H		144917	BW	6.0-8.0	7.0	27.8	9.2	10	749	480 A A	24
P225/50R18 94T		144900	BW	6.0-8.0	7.0	26.9	9.2	10	774	480 A A	23
235/45R18* 94V		000215	BW	7.5-9.0	8.0	26.3	9.3	10	791	480 A A	24

XL = Extra Load (XL) / Reinforced – For Euro-Metric tires, the term 'reinforced' means the same as "Extra Load"

BW = Blackwall

***** = Original Equipment Tire. Tires supplied as Original Equipment on new vehicles are subject only to the Original Equipment Tires Limited Warranty.

Some sizes may contain additional construction features. Ask for our free Tire Limited Warranty manual, which also provides an explanation of tire speed ratings. **See your local Bridgestone retailer for details. NOTE:** When using passenger car-sized tires (P-Metric or Euro-Metric) on most mini-vans, full-size vans, SUV's and light duty pickup trucks, federal regulations require that their load capacity, at all inflation pressures, be reduced by a service factor of 9%.

Bridgestone Americas Tire Operations, LLC
535 Marriott Drive, Nashville, TN 37214 • 615-391-0088
www.bridgestonetire.com • www.tiresafety.com

© 2014 Bridgestone Americas Tire Operations, LLC. All rights reserved.

BRIDGESTONE

0714 / ID2071